


Unity Gain $\frac{1}{4} \lambda$ Mobile Antenna for the 900 MHz Band

DESCRIPTION

- > Silicone covered flexible steel wire whip.
- > Type MU 907-X/l covers 820 – 905 MHz (e.g. for EAMPS).
- > Type MU 907-X/h covers 870 – 960 MHz (e.g. for ETACS, NMT-900 and EGSM).
- > Stainless steel X-mount with M6-thread whip-fastening system.
- > Simple mounting exclusively with access from the outside.
- > Models available with X-mount (oblong), CX-mount (circular) and MM-mount (magnetic).
- > Choice between two connection principles:
 - > X-mount, MM-mount: FME-connection (supplied without cable).
 - > XP4-mount: Permanently attached 4 m low loss cable terminated with FME-connector.

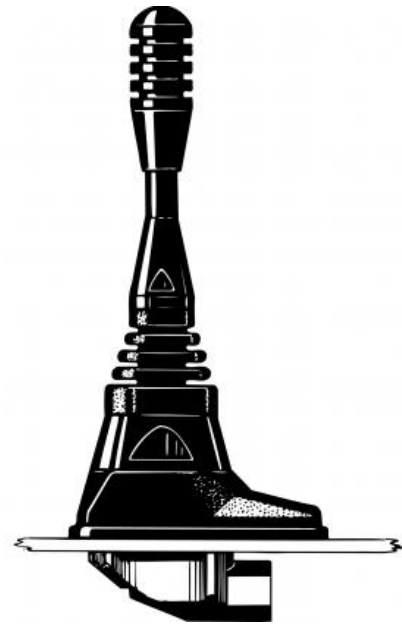

ORDERING

Type	Product No.	Description	Frequency
MU 907-X/l	130001210	X-mount (oblong) with FME-system	820 - 905 MHz
MU 907-X/h	130001206	Same mount as above	870 - 960 MHz
MU 907-CX/l	130001211	CX-mount (circular) with FME-system	820 - 905 MHz
MU 907-CX/h	130001207	Same mount as above	870 - 960 MHz
MU 907-XP4/l	130001212	XP4-mount (oblong) with 4 m cable + FME-system	820 - 905 MHz
MU 907-XP4/h	130001208	Same mount as above	870 - 960 MHz
MU 907-CXP4/l	130001213	CXP4-mount (circular) with 4 m cable + FME-system	820 - 905 MHz
MU 907-CXP4/h	130001209	Same mount as above	870 - 960 MHz
MU 907-MM/l	130001214	MM-mount (magnetic) with FME-system	820 - 905 MHz
MU 907-MM/h	130001215	Same mount as above	870 - 960 MHz

SPECIFICATIONS


Electrical	
Model	MU 907-X...
Frequency	900 MHz-band covered by two models
Antenna Type	Mobile antenna
Polarisation	Vertical
Impedance	50 Ω
Maximum Input Power	60 W
Bandwidth	> 100 MHz @ SWR = 1.5 > 180 MHz @ SWR = 2.0
Gain (EIA RS-329-1)	0 dB
Mechanical	
Materials	Whip: Steel wire covered with silicone tubing, Black-chromed brass Mount: Black-chromed brass Weather- and shockproof plastics Stainless steel
Installation Torque	4 +/- 1 Nm
Colour	Black
Height	84 mm / 3.31 in.
Weight	X-version: Approx. 55 g XP4-version: Approx. 195 g MM-version: Approx. 270 g
Mounting	18 mm dia. hole

ADDITIONAL DATA

INSTALLATION

This antenna should be mounted on the car roof to ensure best omnidirectional coverage. Mounting can take place exclusively with access from the outside when drilling an 18 mm dia. hole. Mounting can take place from the inside by drilling a 14 mm dia. hole. When mounting in a 14 mm dia. hole, remove the bottom plastic ring of the packing gasket with a sharp cutter. When cleaning the car in car-washing machines, remove the whip using a spanner, size 9 mm. After wash, refit the whip and tighten it lightly with the spanner. The MiniMag (abbreviated: MM) is a small, light-weight magnetic mount with a high attaching effect. A silicone layer applied to the contact surface protects the car roof and ensures maximum friction.

1. INSTALLATION DIMENSIONS:

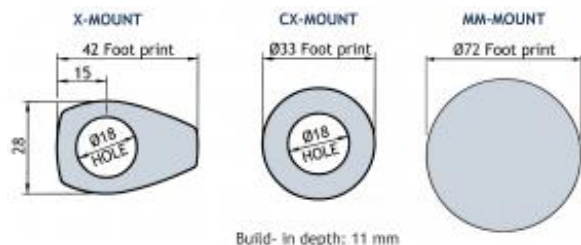

2. INSTALLATION STEPS:

Do not use sealer on rubber gasket or other places.

3. TUNING:

The antenna is delivered factory-tuned and requires no further tuning.

PLEASE NOTE

For safety reasons When using the MU 907-MM/..., car speed must not exceed 140 km/h.

If operating the MM-mount with other whips, whip length must never exceed 320 mm, and utilizing this maximum length, car speed must not exceed 115 km/h.