
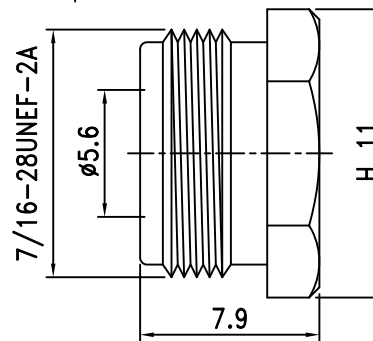
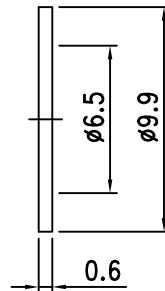
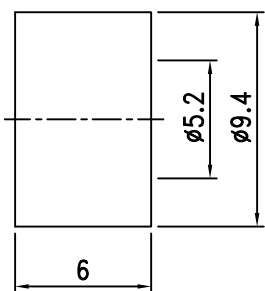
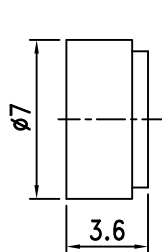
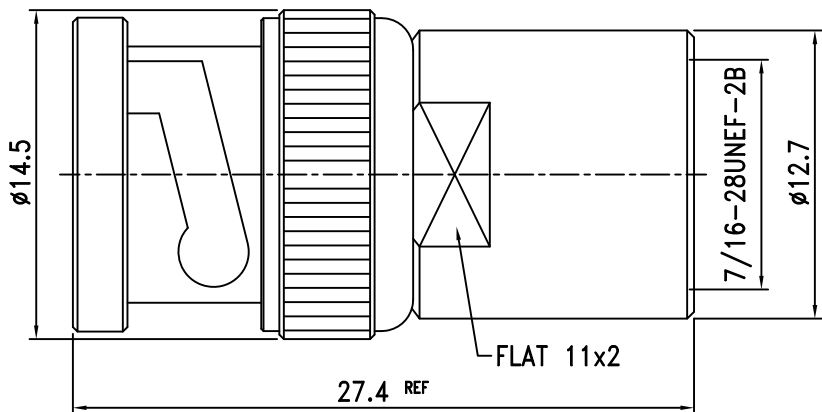
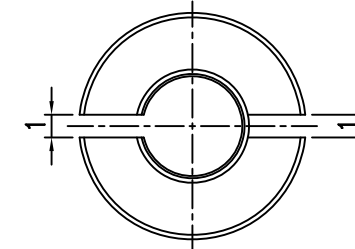
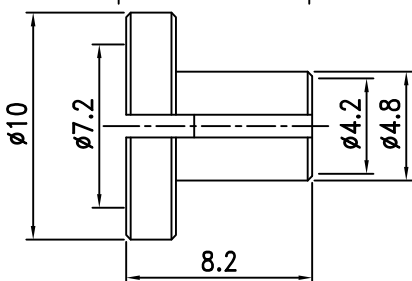

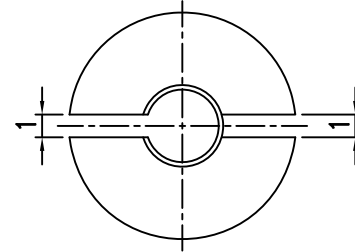
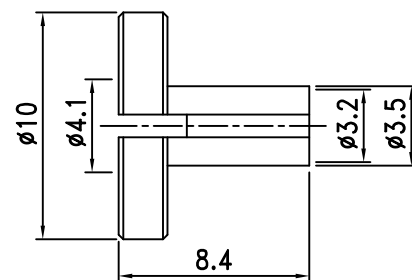

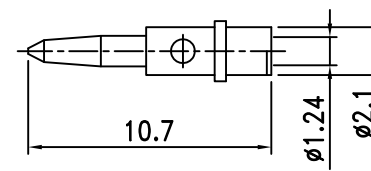
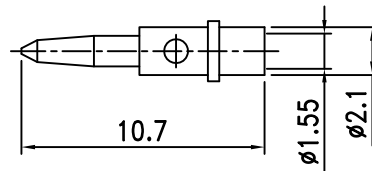


RECOMMENDED  
CABLE STRIPPING DIM'S

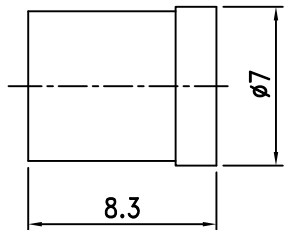

ROHS  
COMPLIANT

15.	Nut	Brass	1	Nickel
14.	Washer	Brass	1	Nickel
13.	Gasket	Silicone	1	Black
12.	Braid Clamp	Brass	1	Nickel
11.	Braid Clamp	Brass	1	Nickel
10.	Shell	Brass	1	Nickel
9.	Gasket	Rebber	1	Red
8.	Retaining Ring	SK-5	1	Nickel
7.	Spring	SK-5	1	Nickel
6.	Washer	Brass	1	Nickel
5.	Insulation	Teflon	1	White
4.	Insulation	Teflon	1	White
3.	Pin	Brass	1	Gold
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS
Jenny	比例 3:1	單位 mm
審核CHECKED	公差TOLERANCE	
Peter	.X	±0.2
主管APPROVAL	.XX	±0.1
	.XXX	±0.05
Peter	ANGLE	±0.5°

夏尼有限公司 SHINING PRECISION CO., LTD	
BNC Male Clamp For RG-58U and H155 Cable	
圖名 TITLE	電腦圖檔CAD FILE
版次REV.	日期DATE
A	2011.10.20

C:/Shining/Factory/CUS/FK/BNC Male Clamp For RG-58U and H155 Cable.dwg