

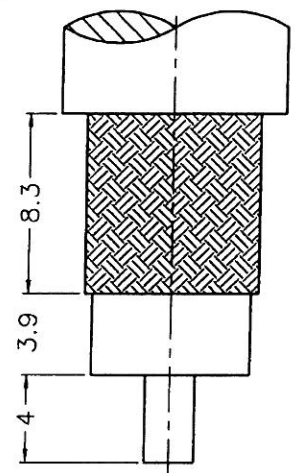
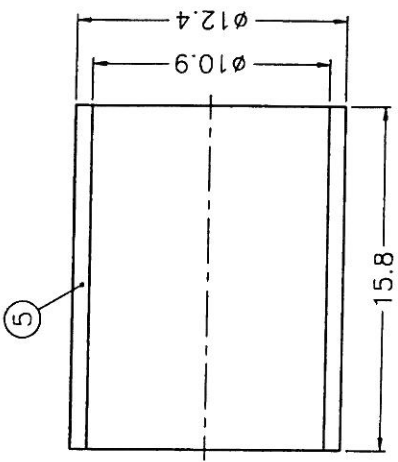


1 2 3 4 5 6 7 8

業務部

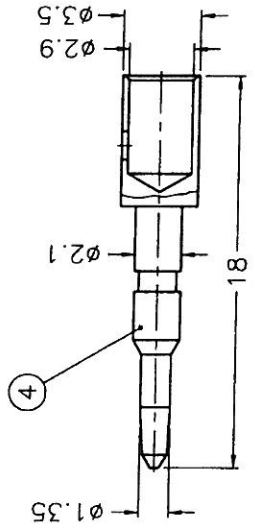

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

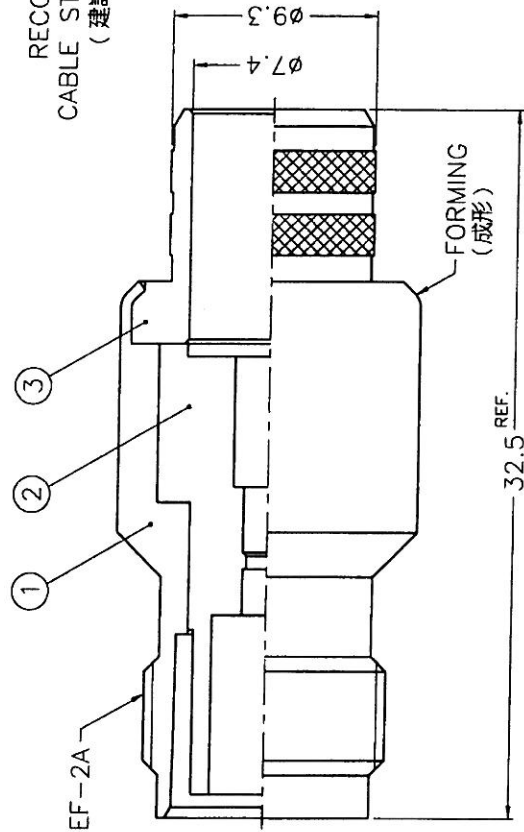

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118"

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. JIS H 3250, C 2700

ISS ZONE		REVISIONS		DESCRIPTION\PER REQUEST\DATE	
5	FERRULE	NOTE 5	NOTE 2	1	FR-124/109X158
4	CONTACT PIN	NOTE 1	NOTE 3	1	RT6121A6-4-35/ 29-B
3	BARREL	NOTE 1	NOTE 2	1	NS000-3-93/74
2	INSULATOR	NOTE 4	NATURAL	1	RT6121A6-2T-50
1	BODY	NOTE 1	NOTE 2	1	RT6121A6-1
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
1				2	
DIMENSIONS ARE IN MILLIMETERS					
UNLESS OTHERWISE SPECIFIED TOLERANCES					
0.5-6 = ±0.2					
6-30 = ±0.4					
30-120 = ±0.6					
120-315 = ±1					
315-1000 = ±1.6					
1000-2000 = ±2.4					
SCALE 3/1 ISSUE A					
PART NO.		APPROVED		DATE	
Amphenol - Kai Jack		ASK.C		12-01-99'	
TAINAN TAIWAN		CHECKED		DATE	
		Casper.W		12-01-99'	
		DRAWN		DATE	
		alex.H		12-01-99'	
TITLE		DRAWING NO.			
TNC REVERSE POLARITY CRIMP JACK (FOR BELDEN 9913, 9914)		KJ-RT6121A6-NT3G-9913-50			
FILE NO.		F:\DWG\RT\6121A6\9913-50\NT3G			

872158