REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

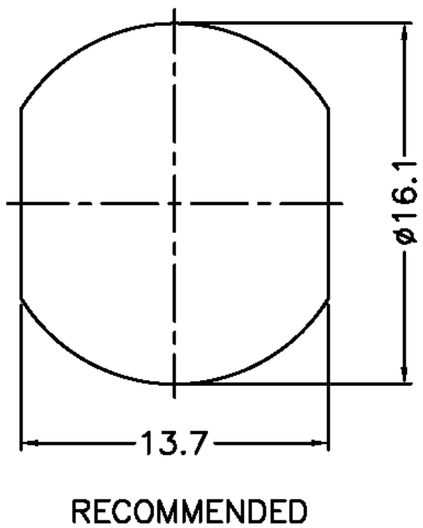

RECOMMENDED
MOUNTING HOLE
(建議架設孔)

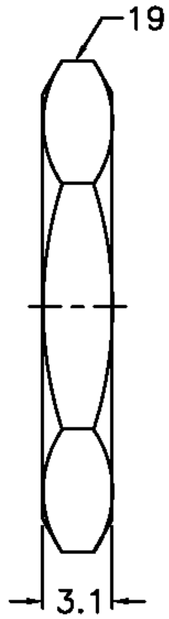

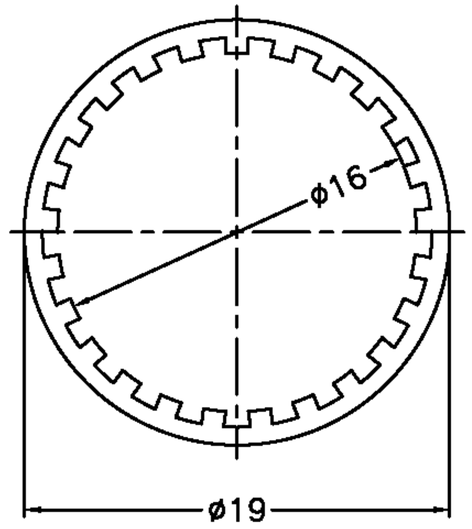

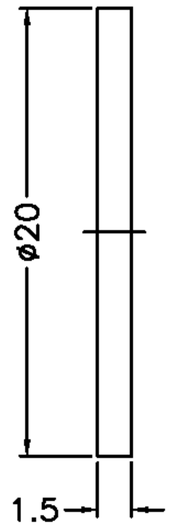

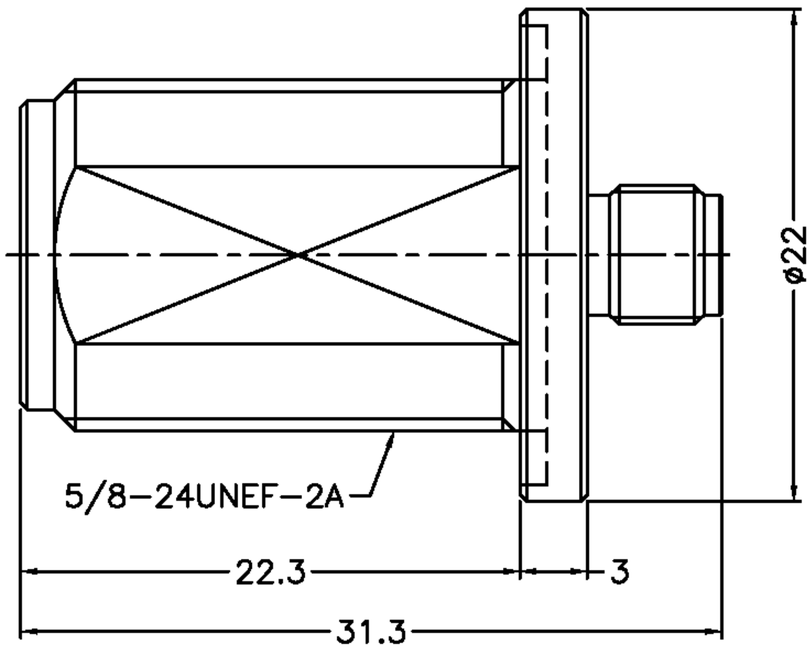

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON

RoHS COMPLIANT

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	HEX NUT	NOTE 1	NOTE 2	1	HN-19-5824-31
6	LOCK WASHER	NOTE 1	NOTE 2	1	LW-16-19-06
5	GASKET	SILICONE	RED	1	GS-160-200-15
4	BODY	NOTE 1	NOTE 2	1	100-SMAF-1
3	CONTACT PIN	NOTE 3	NOTE 4	1	100-NF-SMAF-3
2	INSULATOR	NOTE 5	NATURAL	1	100-NF-SMAF-2-50T
1	BODY	NOTE 1	NOTE 2	1	100-NF-SMAF-1

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 2.5/1 | ISSUE A

PART NO.

APPROVED DATE 04-06-'17

CHECKED DATE 04-06-'17

DRAWN DATE 04-06-'17

TITLE N JACK TO SMA JACK BULKHEAD ADAPTOR

DRAWING NO. 100-NF-SMAF-50

FILE NO. R:\D\G\DWG\100\NF-SMAF\50