

Nissei Power Supply NS-1230M, NS-1230B Spec Sheet



SPECIFICATION

| Model | NS-1230M | NS-1230B |
|----------------------|-------------------------------|-----------------|
| Input voltage | AC 110V or 220V +/- 10% Fixed | |
| Input frequency | 47 - 63 Hz | |
| Polarity Grounded | Negative | |
| Output voltage | DC 4V ~ 16V adjustable | DC 13.8 V Fixed |
| Continuous (13.8V) | 25A | |
| Surge (13.8V) | 30A | |
| Ripple & Noise | < 100mV | |
| Dimension L/W/H (mm) | 154 x 127 x 63 mm | |
| Net Weight | 1.35Kg | |

FEATURE

- Compact size
- Short circuit and over voltage protection
- Output power rated at continuous service
- Binding post output terminals
- Precision regulation of output voltage
- Low peak-peak ripple of less than 0.3%
- External fuse access
- High surge capacity
- Heavy duty metal cabinet with power coating
- LED Backlight

Front Panel :

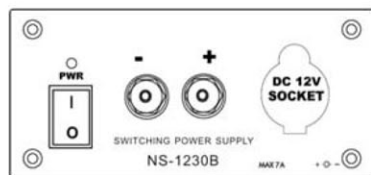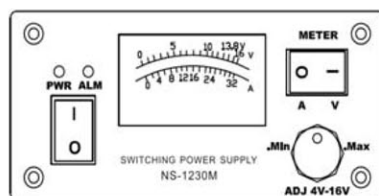


CE / FCC / LVD

Rear panel:


Terminal : <A / B / T type> is option



Anderson Connector

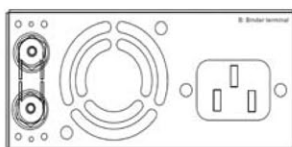

Binder Terminal

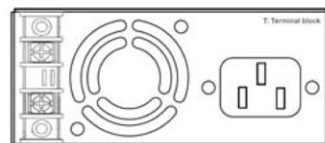

Terminal Block

NS-1230M photo



NS-1230B photo



Taiwan Nissei Sokki Co. Ltd.

NISSEI

No. 2, LN 21, Cheng Kong Rd., Panchiao, Taipei, Taiwan

TEL : 886-2-29626195 FAX : 886-2-29577492

email : info@nissei.com.tw www.nissei.com.tw