

## Rubber Antenna with Universal FME-Connection System for Portable Equipment in the 2 m Band

### DESCRIPTION

- > Sturdy, conical, flexible rubber antenna
- > Full size 1/4 λ whip.
- > Highest quality materials – designed for “wear and tear”.
- > Delivered factory tuned and tested to ensure minimum SWR and optimum performance.
- > Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- > Designed for use with the following of Procoms line of black FME-connectors (to be ordered separately): BFME-UHF, BFME-BNC, BFME-TNC, BFME-N, BFME-EBNC and BFME-ETNC.




### ORDERING

Type	Product No.	Frequency
GA 2/l-FME	140000120	144 - 164 MHz
GA 2/h-FME	140000116	155 - 175 MHz

### ADDITIONAL DATA

### RECOMMENDED BFME-CONNECTORS

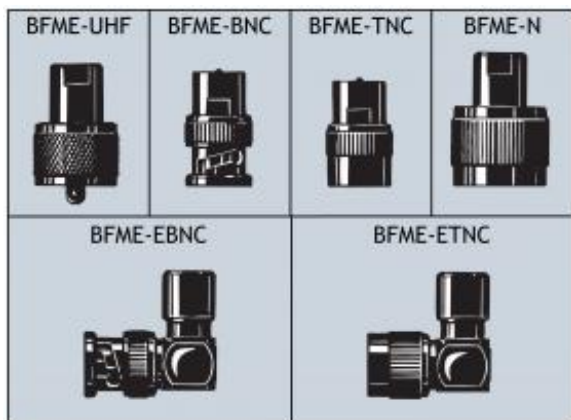

(To be ordered separately)

### SPECIFICATIONS

Electrical	
Model	GA 2/...-FME
Frequency	2 m band covered by two models
Antenna Type	Antenna for portable equipment
Polarisation	Vertical
Impedance	50 Ω
Gain	0 dB (compared to a 1/4 λ portable antenna)
VSWR	< 2.0:1 when mounted directly on portable equipment
Maximum Input Power	100 W
Mechanical	
Connection(s)	FME female (Exchangeable BFME-connectors to be ordered separately)
Materials	Steelwire moulded in thermoplastic rubber Black-chromed brass
Colour	Black
Height	450 mm / 17.72 in.
Weight	0.06 kg / 0.13 lb

### PLEASE NOTE

The GA 2 is also available with SMA male connector and different thread studs, but in this case with fixed, non-exchangeable connector (not FMEconnection system). Information on these special versions on request.

